



PRESSURE TANK

Features:



- ◆ NSF Standard 61, IAPMO R&T UPC approved
- ◆ Polypropylene liner ensures long durability
- ◆ Butyl diaphragm assure long life and safety
- ◆ Highly rust resistant durable baked epoxy coating finish
- ◆ Cast stainless steel water connection
- ◆ Leak free, o-ring sealed air valve cap
- ◆ 100% pressure tested
- ◆ No maintenance

www.stairs.com.tw



PRESSURE TANK

Aquafos water tanks are suited for all water systems: industrial, domestic and agricultural. The tanks are constructed of a polypropylene liner combined with high grade butyl diaphragm to isolate water and air. This provides a closed system for drinking water preventing the growth of bacteria and vermin intrusion. The cast stainless steel water connection is used for corrosion resistance. All tanks are quality tested to ensure the structural integrity of every tank.

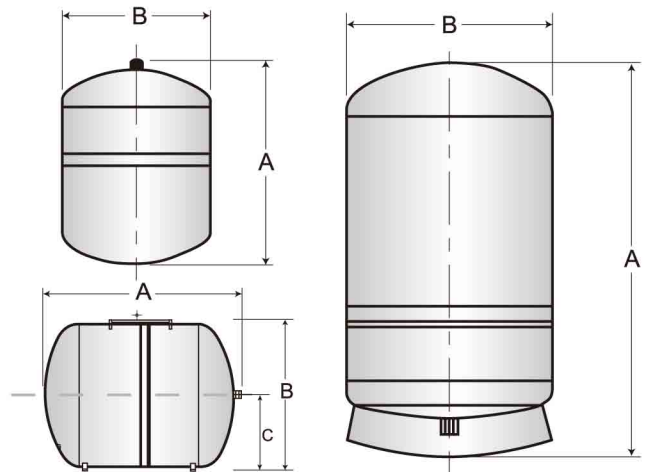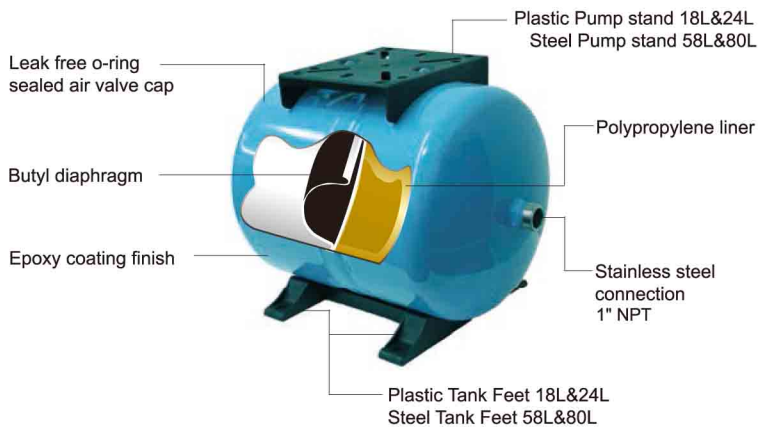

Specifications

Model		Volume		Dimensions				Connection	Shipping Volume (box)		Shipping Weight	
				A		B						
BSP	NPT	liter	gal	mm	inches	mm	inches	BSP/NPT	cu. M	cu. ft	kg	lbs
SPTB3	SPTN3	3	0.5	215	8.6	130	5.1	1" / 3/4"	0.057	2.00	14.5	31.9
SPTB8	SPTN8	8	2.0	285	11.4	203	8.0	1" / 3/4"	0.015	0.52	2.5	5.5
SPTB12	SPTN12	12	3.2	395	15.8	236	9.3	1" / 3/4"	0.021	0.73	3.2	7.1
SPTB18	SPTN18	18	4.5	395	15.8	280	11.0	1" / 3/4"	0.032	1.13	3.7	8.2
SPTB24	SPTN24	24	6	415	16.6	295	11.6	1" / 3/4"	0.037	1.32	4.6	10.1
Vertical Models with Base												
SPTB58	SPTN58	58	14.5	640	25.6	381	15.0	1" / 3/4"	0.108	3.80	9.7	21.4
SPTB80	SPTN80	80	20	790	31.6	381	15.0	1" / 3/4"	0.133	4.70	13.0	28.6
SPTB100	SPTN100	100	28	1010	40.4	381	15.0	1" / 3/4"	0.170	6.00	15.5	34.1
SPTB130	SPTN130	130	34	758	30.3	560	22.0	1-1/4"	0.238	8.40	22.0	48.4
SPTB160	SPTN160	160	44	930	37.2	560	22.0	1-1/4"	0.292	10.30	25.5	56.1
SPTB235	SPTN235	235	62	1180	47.2	560	22.0	1-1/4"	0.370	13.06	36.5	80.3
SPTB305	SPTN305	305	81	1430	57.2	560	22.0	1-1/4"	0.449	15.84	46.8	103.0

Horizontal Models

Model		Volume		Dimensions						Connection	Shipping Volume (box)		Shipping Weight	
				A		B		C						
BSP	NPT	liter	gal	mm	inches	mm	inches	mm	inches	BSP/NPT	cu. M	cu. ft	kg	lbs
SPTB18H	SPTB18H	18	6	400	16.0	280	11.0	140.0	5.5	1" / 3/4"	0.038	1.33	5.0	11.0
SPTB24H	SPTB24H	24	10	425	17.0	295	11.6	145.0	5.5	1" / 3/4"	0.042	1.49	6.0	13.2
SPTB58H	SPTB60H	58	15.9	550	22.0	381	15.0	190.0	7.5	1" / 3/4"	0.104	3.68	11.7	25.7
SPTB80H	SPTB80H	80	20	750	30.0	381	15.0	190.0	7.5	1" / 3/4"	0.143	5.05	15.0	33.0



STAIRS PUMPS

STAIRS INDUSTRIAL CO., LTD.

NO. 3-8, Sanchial Tsun, Lutsao Hsiang,

Chiai Hsien, Taiwan,

Tel: +886(0)53750488

Fax: +886(0)53752330

E-Mail: stairs@stairs.com.tw

All connections are stainless steel.

All tanks are pre-charged at 30 psi / 2 bar unless stated otherwise.

Maximum Working Pressure: 150 psi / 10 bar

Maximum Working Temperature: 200°F/90°C



www.stairs.com.tw